


INSTANTANEOUS TYPE SAFETY GEAR

170

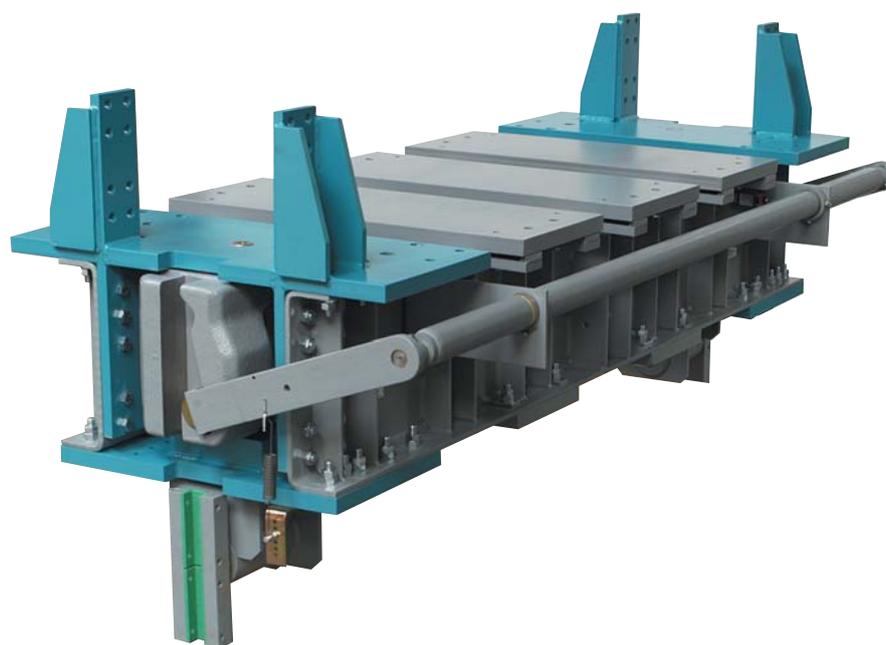

EXCELLENCE IN COMPONENTS

INSTANTANEOUS TYPE SAFETY GEAR


170

Max. rated speed V	0,63 m/s
Max. tripping speed V_{max}	1,00 m/s
Width of rail head	32 mm
Max. mass to be gripped F_{max}	51.908 kg

FEATURES

- component with EC type examination according to directive 95/16/EC (Lifts)
- meets the EN81 specification
- working in down direction
- suitable for rail head width 32 mm
- perfect solution for high duty applications with heavy loads
- easy installation

170 with housing

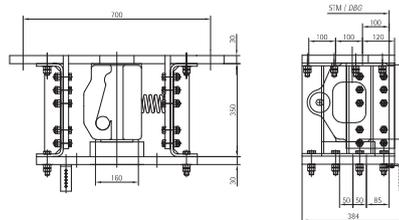

170 with plank

